


3XM

50 Hz - 60 Hz



3" SUBMERSIBLE MOTORS

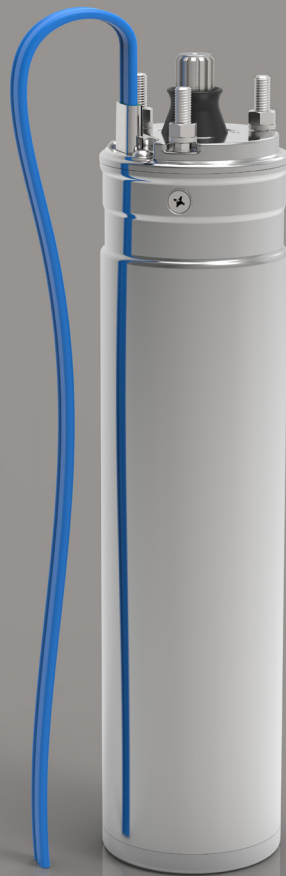

Made in Italy



TECHNICAL SPECIFICATIONS

MOTORS WITH STATOR AND ROTOR SEALED IN A DRY ROOM WITHOUT THE PRESENCE OF OIL OR RESIN

MOTOR/PUMP FLANGE
3", refer to "DIMENSIONS" below

POWERS
Single-phase: from 0,5 to 1,5 Hp
Three-phase: from 0,5 to 1,5 Hp

VOLTAGE
Single-phase: 230 V / 50 Hz - 220 V / 60 Hz
Three-phase: 230;400 V / 50 Hz - 220;380 V / 60 Hz

THRUST LOAD
2000 N

CONSTRUCTION FEATURES

PARTS IN CONTACT WITH WATER all made in AISI 304 stainless steel.

EXTERNAL SLEEVE AND BOTTOM made in AISI 304 stainless steel. Specifically, sleeve is made of AISI 304L (Low carbon) to avoid possible corrosions of the welding and bottom cover is made in microcast AISI 304 stainless steel.

UPPER BRACKET made in cast iron with cataphoresis treatment and protected with an AISI 304 stainless steel cover.

MECHANICAL SEAL double sealing system, consisting of a lip seal on the external part, which serves the purpose of protecting the second graphite/ceramic seal in the standard version; SIC-SIC version available upon request.

BALL BEARING duly oversized to ensure a long lasting motor.

STATOR with 24 slots, specifically developed to achieve maximum electrical yield. It is watertight sealed and it works dry, there is no oil or resin in the stator or rotor chamber.

REMOVABLE POWER CABLE-CONNECTOR to ensure a perfect sealing, also in the most critical conditions, and to aid maintenance operations. More specifically, the connector prevents oil from rising in the conductors up to the joint, thus enabling immersion at greater depths. The power cable complies with all major standards on the use in drinking water (KTV, ACS, WRAS).

SHAFT made in AISI 304 stainless steel.

SAND PROTECTION FILTER in addition to the standard sand protection system. It's a special filter that stops any impurities that may get in contact with the external face of mechanical seal. This ensures a longer mechanical seal lifetime.

100% TESTED, all motors are tested at the end of the line. Seal and electrical checks are carried out on all motors.

VERSIONS UPON REQUEST

Different voltage
SIC-SIC mechanical seal

OPERATING LIMITS

DEGREE OF PROTECTION
IP 68

INSULATION CLASS
F

VOLTAGE TOLERANCE
-10% / +10%

PUMPED LIQUID TEMPERATURE
0°C - 35°C

MIN. COOLING FLOW
0,1 m/s

MAX. STARTS / HOUR
30

MOUNTING
Vertical and/or horizontal


MAX. IMMERSION DEPTH
60 m

SINGLE-PHASE VERSION
PSC type (Permanent Split Capacitor).

ACCESSORIES

Different cable lengths
Capacitors
Control panels

DIMENSIONS

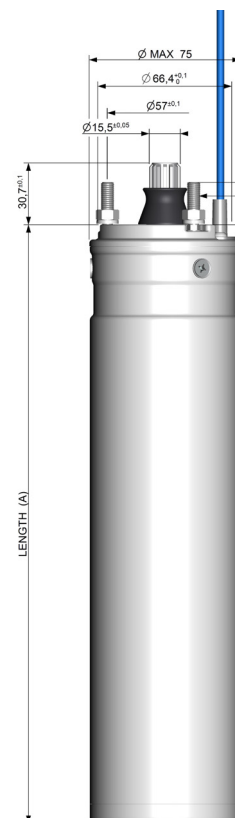

ELECTRICAL DATA 3XM - 50Hz

Type	P ₂ [Hp]	P ₂ [kW]	Voltage [V]	Ph	I _n [A]	I _{adv} [A]	rpm	cos φ	η [%]	Capacitor [μF]	Thrust Load [N]	Length A [mm]	Weight [kg]	Cable Length [m]	Cable Section [mm ²]
3XM-S050	0,5	0,37	230	1	3,6	12,3	2820	0,91	49	20	2000	308,5	6,1	1,5	4 x 1
3XM-S075	0,75	0,55	230	1	4,9	17,2	2830	0,93	51	25	2000	348,5	7,1	1,5	4 x 1
3XM-S100	1	0,75	230	1	6,4	22,4	2820	0,95	54	35	2000	378,5	8	1,5	4 x 1
3XM-S150	1,5	1,1	230	1	10,6	37,1	2790	0,87	52	40	2000	418,5	9,1	1,5	4 x 1
3XM-T050	0,5	0,37	230	3	4,2	14,7	2850	0,45	49	-	2000	308,5	6,1	1,5	4 x 1
			400		2,4	8,4									
3XM-T075	0,75	0,55	230	3	4,4	15,4	2840	0,54	62	-	2000	348,5	7,1	1,5	4 x 1
			400		2,5	8,8									
3XM-T100	1	0,75	230	3	5,9	20,1	2830	0,53	58	-	2000	378,5	8	1,5	4 x 1
			400		3,5	12,3									
3XM-T150	1,5	1,1	230	3	7,7	26,9	2800	0,56	62	-	2000	418,5	9,1	1,5	4 x 1
			400		4,4	15,4									



PM S.r.l.

Viale della Ricerca n°3
36049 Sovizzo (VI) - Italy
T. +39 0444 673043 F. +39 0444 677273
info@pmtechnology.eu
www.pmtechnology.eu
Company under direction and coordination of
PEDROLLO GROUP S.R.L.



ISO 9001:2015 Certified Company

© COPYRIGHT PM S.r.l.

All rights reserved.
All information shown in this catalogue are purely indicative;
PM S.r.l. reserves the right to make any necessary variation without prior
notice.

EDIT: BROCHURE 3XM EN/MAR/2026